


SELEKT

BRD SNO / BRD SNB

MIG TORCHES

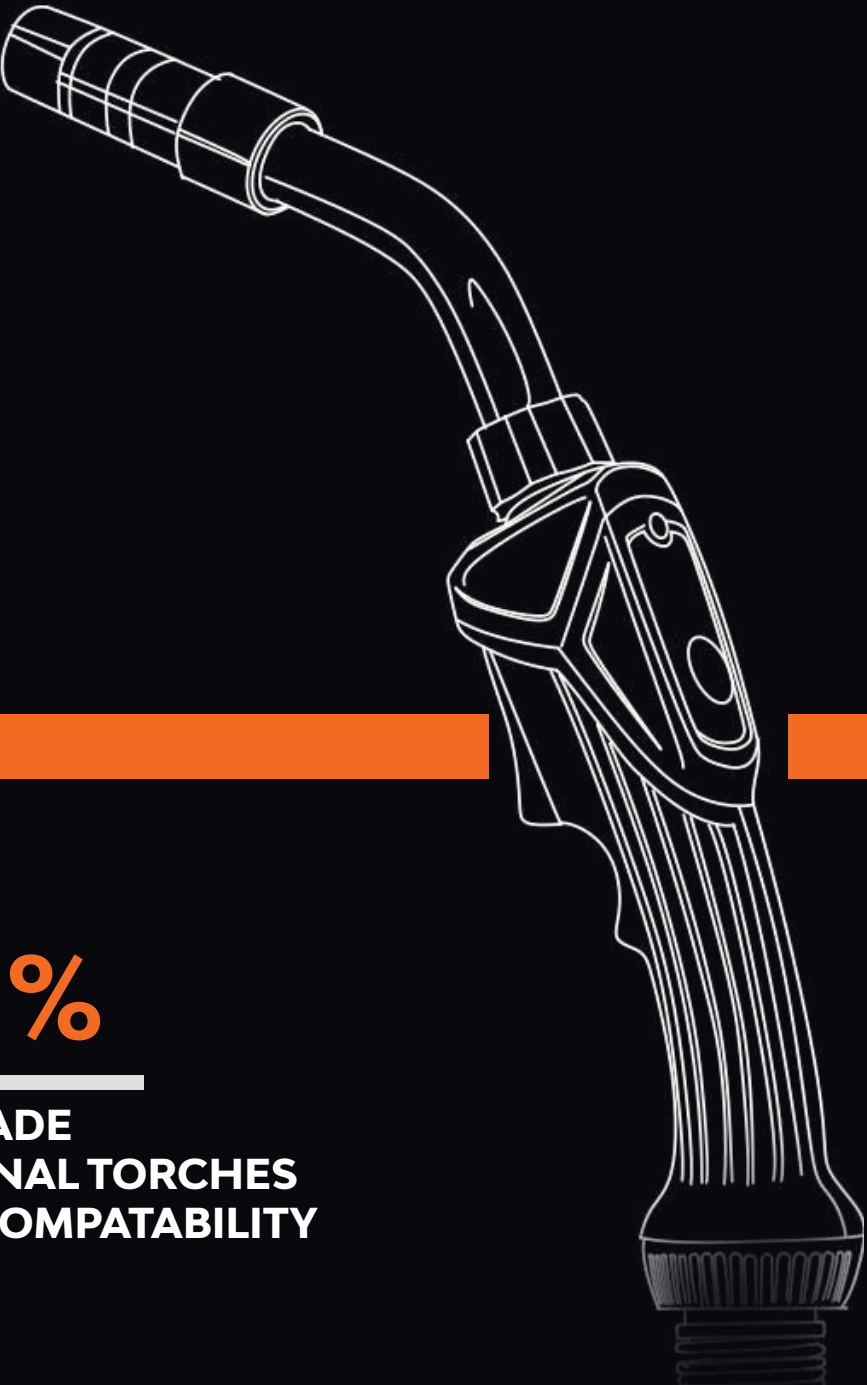

100%
QUALITY MADE
PROFESSIONAL TORCHES
BERNARD COMPATIBILITY

CNC MACHINED CONSUMABLES PARTS

Designed to the same Quality & Specifications as OEM parts to ensure the best performance, longevity, and performance .



Available with
single and
double buttons
and with
potentiometer



Positive grip
trigger with long
life contacts.

Ergonomic,
lightweight and
solid handle
construction.

MACHINE END SYSTEMS


Smooth and consistent wire feed. Extra
length cable support systems.



Smooth
revolving ball
joint and steel
spring cable
support.



Heavy duty metal
jacket with high
conductivity
inner copper
tube.



**QUESTION : KNOW THE DIFFERENCE
HARD WORKING & WORKING HARD?**



Technical Data 参数		SNQ 200	SNQ 300	SNQ 400
Cooling Method 冷却方式		Air-Cooled	Air-Cooled	Air-Cooled
Rating : CO ₂		200A	300A	400A
Rating: Mixed Gas 混合气体		150A	200A	320A
Duty Cycle: 暂载率		60%	60%	60%
Wire Size: 焊丝直径		0.030"-0.045"(0.8-1.2)	0.030"-0.045"(0.8-1.2)	0.030"-1/16"(0.8-1.6)

Order Part No.	MILLER FITTING	10FT/3M	SNQ 200-10M	SNQ 300-10M	SNQ 400-10M
		12FT/3.6M	SNQ 200-12M	SNQ 300-12M	SNQ 400-12M
		15FT/4.5M	SNQ 200-15M	SNQ 300-15M	SNQ 400-15M
	EURO FITTING	10FT/3M	SNQ 200-10E	SNQ 300-10E	SNQ 400-10E
		12FT/3.6M	SNQ 200-12E	SNQ 300-12E	SNQ 400-12E
		15FT/4.5M	SNQ 200-15E	SNQ 300-15E	SNQ 400-15E

ANSWER : HAVING THE RIGHT TOOL.



Technical Data 参数		SNB 200	SNB 300	SNB 400
Cooling Method 冷却方式		Air-Cooled	Air-Cooled	Air-Cooled
Rating : CO ₂		200A	300A	400A
Rating: Mixed Gas 混合气体		150A	200A	320A
Duty Cycle: 暂载率		60%	60%	60%
Wire Size: 焊丝直径		0.030"-0.045"(0.8-1.2)	0.030"-0.045"(0.8-1.2)	0.030"-1/16"(0.8-1.6)

Order Part No.	MILLER FITTING	10FT/3M	SNB 200-10M	SNB 300-10M	SNB 400-10M
		12FT/3.6M	SNB 200-12M	SNB 300-12M	SNB 400-12M
		15FT/4.5M	SNB 200-15M	SNB 300-15M	SNB 400-15M
	EURO FITTING	10FT/3M	SNB 200-10E	SNB 300-10E	SNB 400-10E
		12FT/3.6M	SNB 200-12E	SNB 300-12E	SNB 400-12E
		15FT/4.5M	SNB 200-15E	SNB 300-15E	SNB 400-15E