

KLASIK



BZL MIG

TORCHES





IT'S ALL IN THE DETAILS!

DONT SACRAFICE COMFORT OVER PERFORMANCE

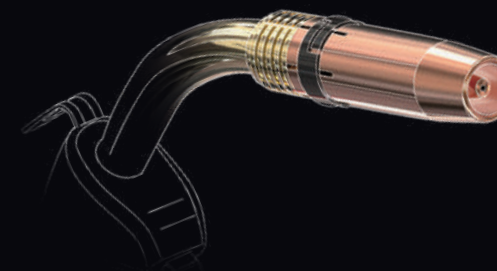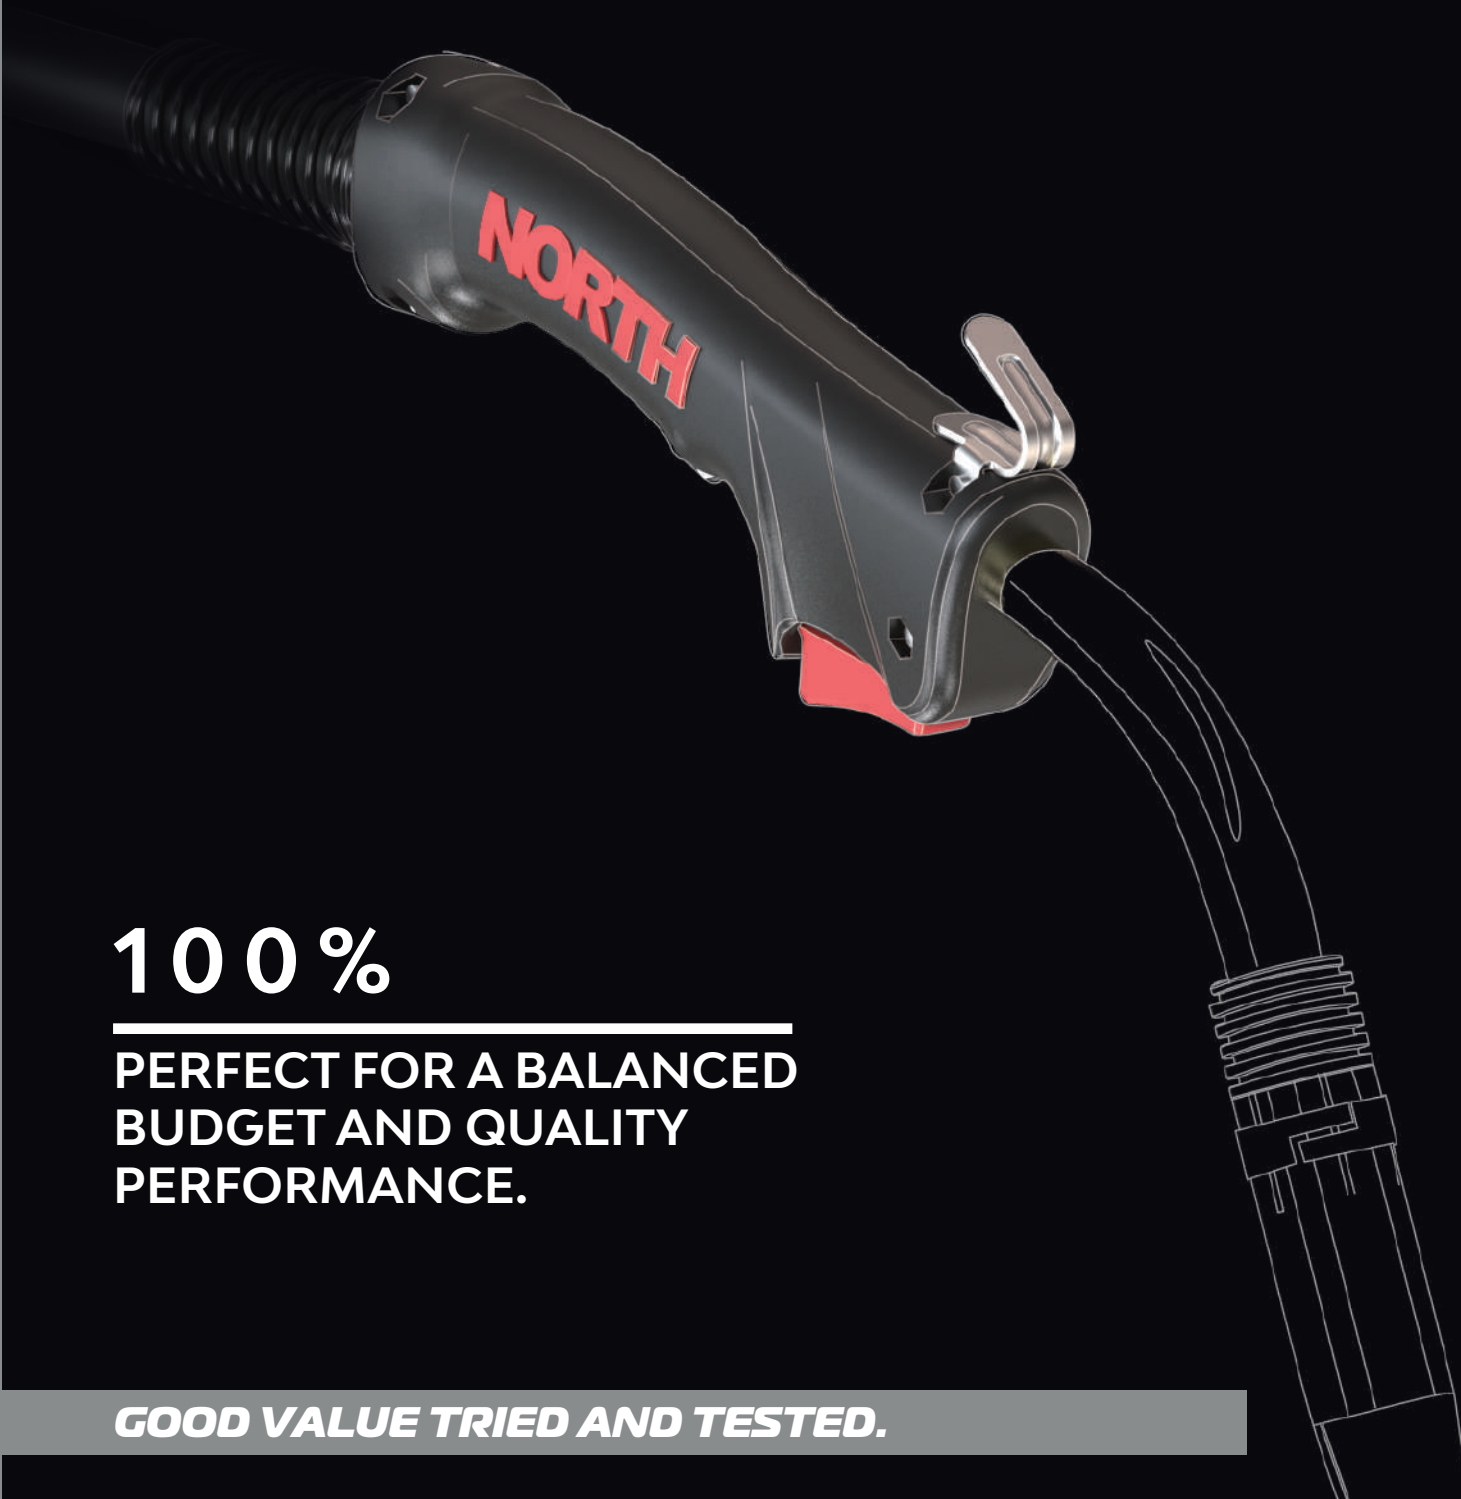

CNC machined consumable parts are 100% interchangeable with OEM Mig Torches.

Hanger Hook
Easy to locate

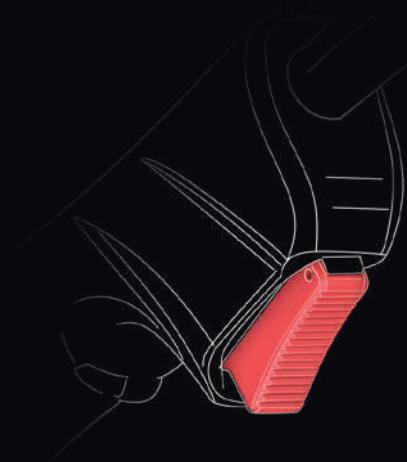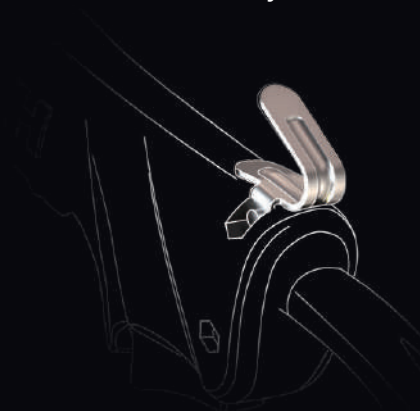

Positive grip trigger button with long life contacts.

Ergonomic,solid handle design



Cable supported by steel spring.

Heavy duty metal jacket with high conductivity inner copper tube.

100%

PERFECT FOR A BALANCED BUDGET AND QUALITY PERFORMANCE.

GOOD VALUE TRIED AND TESTED.



Technical Data 参数			N 15	N 15FE	N 24	N 25	N 26
Cooling Method 冷却方式			Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled
Rating : C0 ₂			180A	180A	250A	230A	290A
Rating: Mixed Gas 混合气体			150A	150A	220A	200A	260A
Duty Cycle: 暂载率			60%	60%	60%	60%	60%
Wire Size: 焊丝直径			0.6-1.0	0.6-1.0	0.8-1.2	0.8-1.2	0.8-1.2
Order Part No.	EURO FITTING	3M	N15-3	N15FE-3	N24-3	N25-3	N26-3
		4M	N15-4	N15FE-4	N24-4	N25-4	N26-4
		5M	N15-5	N15FE-5	N24-5	N25-5	N26-5




N 36	N 40	NW-24	NW-501	NMT551
Air-Cooled	Air-Cooled	Water-Cooled	Water-Cooled	Water-Cooled
340A	350A	300A	500A	600A
300A	320A	270A	450A	550A
60%	60%	100%	100%	100%
0.8-1.6	1.0-2.4	0.8-1.2	1.0-1.6	1.0-1.6
N36-3	N40-3	NW24-3	NW-501E-3	NMT551-3
N36-4	N40-4	NW24-4	NW-501E-4	NMT551-4
N36-5	N40-5	NW24-5	NW-501E-5	NMT551-5

KLASIK

PNA MIG

TORCHES

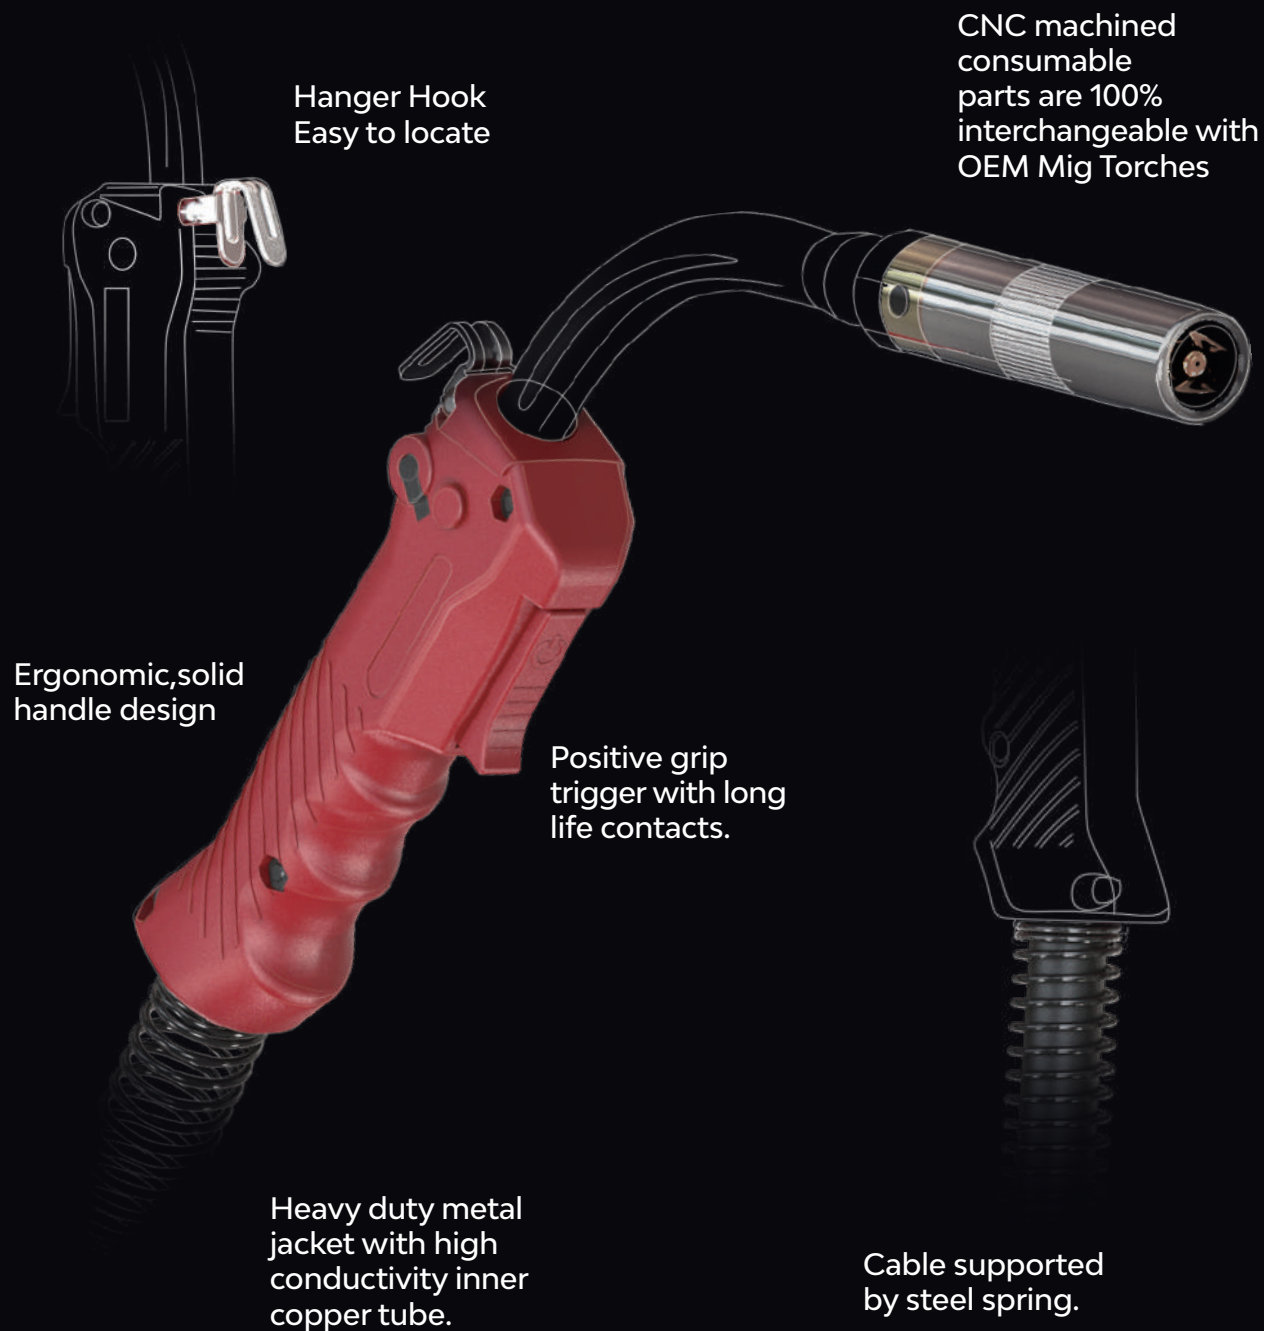

Technical Data 参数			QTB-200A	QTB-350A	QTB-500A	QTB-600A
Cooling Method 冷却方式			Air-Cooled	Air-Cooled	Air-Cooled	Air-Cooled
Rating : C0₂			200A	350A	500A	600A
Rating: Mixed Gas 混合气体			180A	300A	420A	500A
Duty Cycle: 暂载率			60%	60%	60%	35%
Wire Size: 焊丝直径			0.8-1.2	1.0-1.4	1.2-1.6	1.2-2.0
Order Part No.	PNA FITTING	3M	NS-200K-3	NS-350K-3	NS-500K-3	NS-600K-3
		4M	NS-200K-4	NS-350K-4	NS-500K-4	NS-600K-4
		5M	NS-200K-5	NS-350K-5	NS-500K-5	NS-600K-5

GOOD VALUE TRIED AND TESTED.