

MAGNIFIK PUSH PULL



THE NEW PUSH-PULL WELDING EXPERIENCE

LIGHT WEIGHT,
SUPERB COMFORT,
POWERFUL AND ENDURING.

Easy read LCD
screen

Potentiometer
for wire speed
regulation.

Clear cover allows
visual reference of
all moving parts.

Access working parts
via a flip top cover.

Loosen the lock nut no
more than 1 turn.
Rotate to the position of
your choice and tighten
taper lock nut firmly to
secure desired position.

Smooth revolving ball
joint and steel spring
cable support.

WE'VE SOLVED YOUR PROBLEM. TAKE
THE NEXT STEP AND INQUIRE WITH
OUR TEAM

MAGNIFIK PUSH PULL




Mode selection and adjustment.

Non main stream dedicated consumables. Contact tips Binzel type.

Ribbed conture on handel allows for secure grip.

Led light for start up and see before welding

Torch Control Module Options

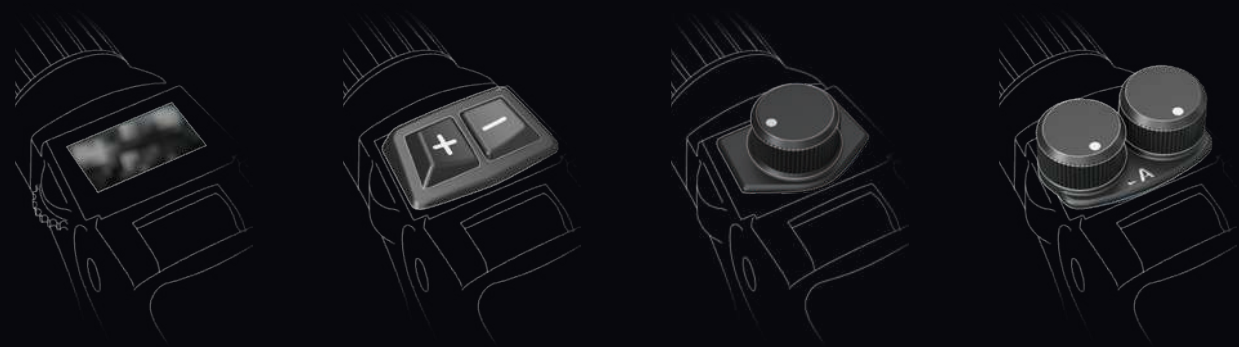

HIGH PERFORMANCE MIG



Technical Data 参数	MPG 300	MPW 300	MPW 400
Cooling Method 冷却方式	Air-Cooled	Water Cooled	Water Cooled
Rating : C0 ₂	290A	350A	450
Rating: Mixed Gas 混合气体	260A	300	400
Duty Cycle: 暂载率	60%	100%	100%
Wire Size: 焊丝直径	0.8-1.2	0.8-1.2	1.0-1.6
Motor1: 电机 1	18m/min, 24V	18m/min, 24V	18m/min, 24V
Motor2: 电机 2	25m/min, 24V	25m/min, 24V	25m/min, 24V